

PATENT ABSTRACTS OF JAPAN

(11)Publication number : 11-344952
 (43)Date of publication of application : 14. 12. 1999

(51) Int. Cl. G09G 3/28
 G09G 3/20


(21)Application number : 10-153059 (71)Applicant : FUJITSU LTD
 (22)Date of filing : 02. 06. 1998 (72)Inventor : TAKAYAMA KUNIO
 AWAMOTO KENJI
 HASHIMOTO YASUNOBU

(54) DRIVING CIRCUIT FOR DISPLAY DEVICE

(57) Abstract:

PROBLEM TO BE SOLVED: To reduce reactive power by controlling respective switching elements of a maintenance circuit part.

SOLUTION: When timing control signals IN1, IN4 are applied to switching elements Q1, Q4 from a control circuit 1, a panel capacitance Cp is charged and a voltage to be applied between both ends (P1-P2) of the panel capacitance is fixed to Vs. After the switching elements Q1, Q4 are turned off, when a switching elements Q5 is turned on, the panel capacitance Cp and a coil L form a resonance circuit and electric charge stored in the panel capacitance Cp flows out as a resonance current to recharge the panel capacitance Cp in a reverse polarity. After the switching element Q5 is turned off, when the switching elements Q2, Q3 are turned on, a voltage between the terminals of the panel capacitance Cp is fixed to a -Vs. After the switching elements Q2, Q3 are turned off, when the switching element Q6 is turned on, the resonance circuit is formed with the panel capacitance Cp and the coil L to recharge the panel capacitance Cp.

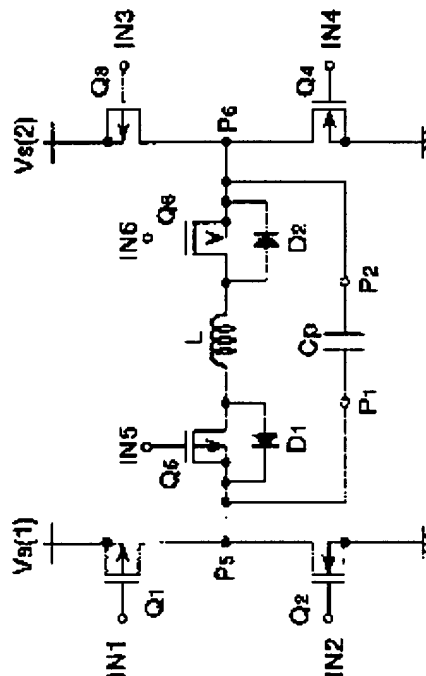

LEGAL STATUS

[Date of request for examination]

[Date of sending the examiner's decision
 of rejection]

[Kind of final disposal of application
 other than the examiner's decision of
 rejection or application converted
 registration]

[Date of final disposal for application]

[Patent number]

[Date of registration]

[Number of appeal against examiner's
decision of rejection]

[Date of requesting appeal against
examiner's decision of rejection]

[Date of extinction of right]

Copyright (C); 1998, 2003 Japan Patent Office